

#### ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com



Follow us on

Facebook

IS045001:2018





YouTube










Forklift" App







 ${\it HANGCHA~GROUP~CO.}, {\it LTD.~reserves~the~right~to~make~any~changes~without~notice~concerning~colors},$ equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

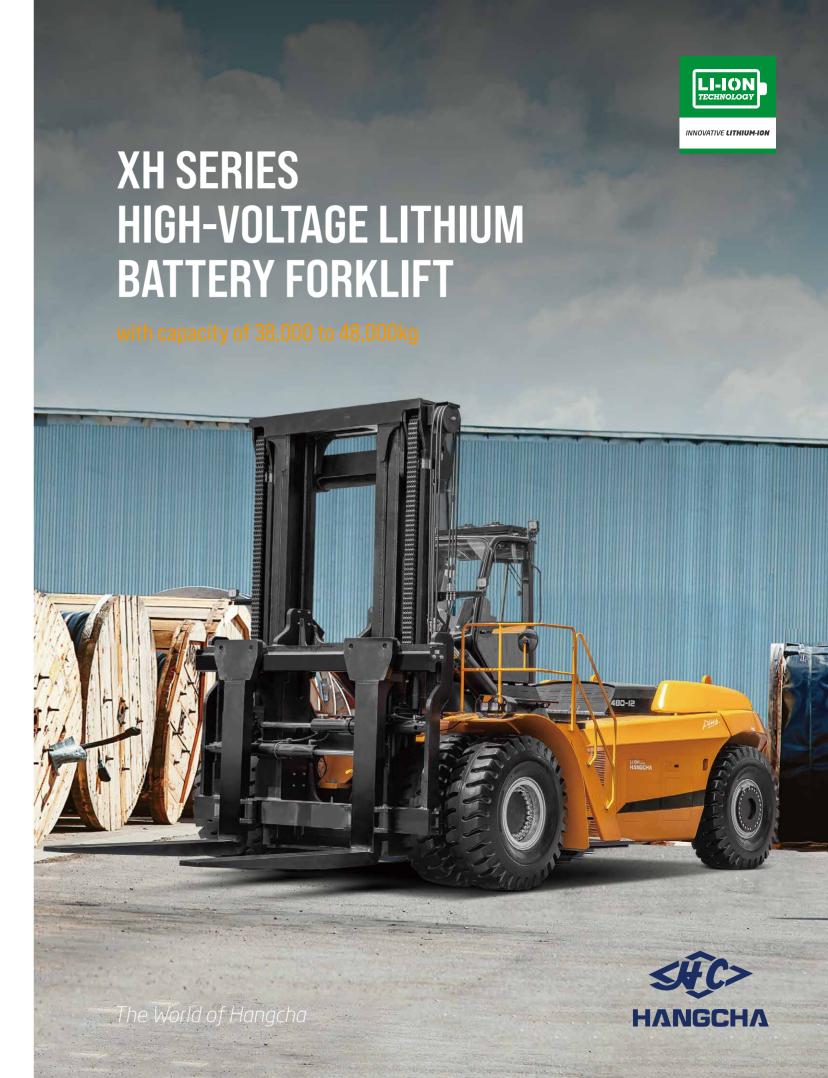

# XH SERIES HIGH-VOLTAGE LITHIUM BATTERY FORKLIFT

Independently developed by Hangcha on the basis of decades of deep understanding of electric forklifts and internal combustion forklifts, XH series high-voltage counterweight lithium battery forklifts are a new series of high-voltage counterweight lithium battery forklifts that first use a new energy vehicle voltage platform and represent a breakthrough over the traditional design concept. Representing a redefinition of electric forklifts in terms of efficiency, power, reliability, etc., XH series forklift models have performance and operating condition completely superseding that of the internal combustion forklifts.

**VOLTAGE** 

618 V

CHARGING TIME (20-100%)

1.5 Hour IP67

**VEHICLE WATER RESISTANCE** 

IPX4

SPEED MODELS

PROTECTION RATE

### Stylish appearance

/ With the inherited exterior design of X series internal combustion forklifts and a smooth and sturdy profile, the whole vehicle is stylish, sturdy and powerful, showing modern industrial aesthetics.







## **ULTRA LONG BATTERY LIFE**

- / A large-capacity lithium battery for the standard configuration can meet the long battery life need.
- / Both the drive and operating systems are efficient and energy-saving vehicle-grade permanent magnet synchronization systems.
- / High-voltage platform, less vehicle current and minimal system heat loss.
- / Braking energy recovery effectively prolongs operating time.



A double-drive motor system increases



#### **Advancement**

A high-torque permanent magnet synchronous motor provides strong power for the vehicle with performance indicators benchmarked against that of internal combustion forklifts.

618V

A high-voltage platform with low system loss, a standard chilled water tank for heavy-duty truck to achieve good heat dissipation.



With motor, electric control and battery adopting liquid-cooling heat dissipation, the forklift can absolutely carry out long-time and high-intensity operations as internal combustion forklifts.



#### Intelligence

- / A vehicle central controller is provided, which has bus architecture, several built-in diagnosis and management functions and a central fault alarm function.
- / An optional intelligent management system is provided to enable intelligent remote monitoring and easier equipment management and logistics management.



#### **Maintainability**

- / The overturnable cab and electric tipping cylinder make tipping easier and more labor-saving.
- / The wide-opened hood and removable cover better facilitate repair and maintenance of electrical components.

## SAFE AND RELIABLE

- / The cover of the vehicle is designed to be sealed to the water resistance level of IPX4.
- / The electrical system has high-voltage interlocking, insulation monitoring and potential balancing functions to offer vehicle-grade safety.



Both the battery and junction box have MSD(Manual Service Disconnect) maintenance switches to enable one-click power-down and safer maintenance.



Key structural parts have been verified highly reliable by the market for many years while being used by internal combustion forklifts.



All the motor and electronic controls reach the dust and water resistance level of IP67, a high protection level adequate to withstand harsh operating environments.



The high-voltage lithium battery is equipped with an automatic fire extinguisher for the standard configuration. The vehicle is equipped with a pipe network automatic fire extinguisher for the standard configuration.



A turning deceleration function effectively reduces risk of tipping over.

### **Features**

| Transmission   | Standard | Options |
|--|----------|---------|
| Pneumatic tyre                                       | •        |         |
| Solid tyre   |          | 0       |
| Steering system                                      |          |         |
| Fully hydraulic power steering                       | •        |         |
| Centralized lubrication system (machine)             |          | 0       |
| Truck  |          |         |
| Tow pin  | •        |         |
| Electrostatic discharge chain                        |          | 0       |
| Rear-view mirror on right & left mudguards           | •        |         |
| Separate brake oil tank                              | •        |         |
| Operating system                                     |          |         |
| Integrated joystick                                  | •        |         |
| Adjustable steering column                           | •        |         |
| Adjustable armrest                                   | •        |         |
| Hydraulic system                                     |          |         |
| Variable hydraulic pump system                       | •        |         |
| Four-way hydraulic valve                             | •        |         |
| Operation proportion control                         | •        |         |
| Cab  |          |         |
| Cabin  | •        |         |
| Climate control system (air-conditioning and heater) | •        |         |
| Manual tilting cabin                                 | •        |         |
| Electric tilting cabin                               | •        |         |
| Radio  | •        |         |
| Sunshade   | •        |         |
| USB charging interface                               | •        |         |
| Clothes hanger hook                                  | •        |         |
| Reading light  | •        |         |
| 1 x 24V power supply                                 |          | 0       |
| 1 x 12V power supply                                 |          | 0       |
| License plate frame                                  |          | 0       |
| Fan  | •        |         |
| Lifting components                                   |          |         |
| Duplex mast  | •        |         |
| Standard lifting height                              | •        |         |
| Optional lifting height                              |          | 0       |
| Standard fork  | •        |         |
| Other fork specifications                            |          | 0       |
| Fork hook on type                                    |          | 0       |
| Hydraulic Fork Positioning                           | •        |         |
| Independently-adjustable fork  Built in Sideshift    |          | 0       |
|  | •        |         |
| Other  |          |         |
| Standard color                                       | •        |         |
| User defined colour                                  |          | 0       |
| Fire extinguisher (2kg/4kg)                          |          | 0       |

| Donate December (ODC) with home                            |   |   |
|--|---|---|
| Operator Presense System (OPS) with buzzer                 | • |   |
| .CD display screen   |   |   |
| Main power switch  | • |   |
| Emergency power off switch                                 | • |   |
| Maintenance-free 24V lead acid battery                     | • |   |
| Reverse buzzer   | • |   |
| ligh decible horn  | • |   |
| LED lights (entire vehicle)                                | • |   |
| 2 x Working light on front mudguard                        | • |   |
| 2 x Front working light on top of cabin                    | • |   |
| 2 x Rear working light on top of cabin                     | • |   |
| 2 x Working light on both sides of mast                    | • |   |
| Reverse sensor   | • |   |
| Rearview camera system                                     | • |   |
| Rearview camera system with memory                         |   | 0 |
| ront & rearview camera system                              |   | 0 |
| Front & rearview camera system with memory                 |   | 0 |
| 4 directions camera system with single display             |   | 0 |
| 4 directions camera recording system with single display   |   | 0 |
| n cabin CCTV   |   | 0 |
| Rear blue safety light                                     |   | 0 |
| Front and rear blue safety light                           |   | 0 |
| Three sided blue danger zone light                         |   | 0 |
| Overspeed alarm  |   | 0 |
| Speed limitation   |   | 0 |
| Voice reverse alarm  |   | 0 |
| Two-way radio  |   | 0 |
| Weight indicator in display                                |   | 0 |
| Flashing warning light (non rotating) with control switch  | • |   |
| Tyre pressure monitoring                                   |   | 0 |
| On-board diagnostics system                                | • |   |
| Nater cooling system for lithium battery                   | • |   |
| Automatic fire suppression system                          | • |   |
| Automatic fire suppression system for lithium battery pack | • |   |
| Manual Service Disconnect (MSD) switch                     | • |   |
| ligh voltage interlock                                     | • |   |
| insulation protection                                      | • |   |
| Power-on self-test   | • |   |
| Energy recovery (braking regeneration)                     | • |   |
| /ehicle Control Unit (VCU)                                 | • |   |
| Dual charging ports  | • |   |
| Turning deceleration                                       |   | 0 |
| Hour meter   | • |   |
| Battery charge indicator                                   | • |   |
| Low hydraulic pressure alarm indicator                     | • |   |
| Hydraulic oil filter warning indicator                     | • |   |
| Drive mode indicator                                       | • |   |
| Parking brake indicator                                    |   |   |